EKI-2728MI

6G+2G Multi-Mode Unmanaged Ethernet Switch with Wide Temperature

Features

- Supports 10/100/1000 Mbps Auto Negotiation
- Supports jumbo frame transmission up to 9kbytes
- Provides Slim size, DIN-rail with IP30 metal mechanism
- Provides broadcast storm protection
- Redundant DC power supply and one removable AC power input

Introduction

EKI-2728MI is a cost effective unmanaged industrial Ethernet switch which supports Giga Ethernet. It supports Green Power requirement, furthermore, EKI-2728MI also supports advanced network standards to optimize network performance, reduce maintenance cost, and secure network safety.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.1ab, 802.1z
- **LAN** 10/100/1000Base-Tx
- **Transmission Distance** Ethernet: Up to 100 m
  Fiber: Up to 2 km
- **Transmission Speed** Up to 1000 Mbps

Interface

- **Connectors** 6 x RJ45 ports
  2 x SC type fiber optic
- **LED Indicators** System: PWR1, PWR2, P-Fail
  Gigabit Ethernet copper: Link/Activity,
  speed (10/100/1000 Mbps)
  Fiber SC: Link/Activity

Mechanism

- **Enclosure** IP30, metal shell with solid mounting kits
- **Dimensions (W x H x D)** 59.6 x 152 x 105 mm (2.35" x 5.98" x 4.13")
- **Mounting** DIN-rail, Wall

Power

- **Power Consumption** Max. 10.2 W
- **Power Input** 12 ~ 48 V_{DC}, 24 V_{AC} (18 ~ 30 V_{AC})
- **Fault Output** 1 Relay Output, 1 A @ 24 V_{DC}

Protection

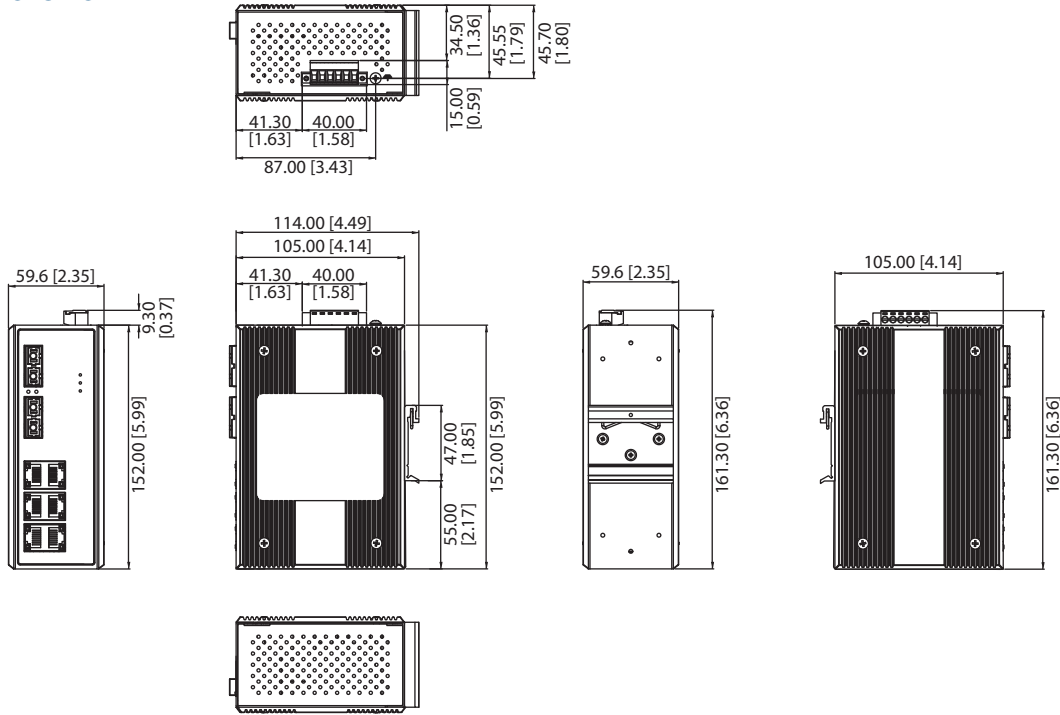- **Power Reverse** Present

Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 505,863 hours

Certifications

- **Safety** UL 508, Class I, Division 2
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN
  61000-4-5 EN 61000-4-6 EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

Dimensions

34.50 [1.36]
45.55 [1.79]
45.70 [1.80]
15.00 [0.59]
41.30 [1.63]
40.00 [1.58]
87.00 [3.43]

59.6 [2.35]
9.30 [0.37]
152.00 [5.99]

114.00 [4.49]
105.00 [4.14]
41.30 [1.63]
40.00 [1.58]
47.00 [1.85]
55.00 [2.17]
152.00 [5.99]

59.6 [2.35]
161.30 [6.36]

105.00 [4.14]
161.30 [6.36]

Panel Cut-out Dimensions: 114 x 152 x 59.6 mm (4.49" x 5.99" x 2.35")

Ordering Information

- **EKI-2728MI**   6Gx+2 Multi-mode Fiber Unmanaged Ethernet Switch w/ Wide Temp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advantech](#):
  [EKI-2728MI-AE](#)