

FEATURES
120W Constant Current LED Driver
LSWC-120 Series

- Wide AC Input 90~305VAC
- High Efficiency & High Power Factor – Meets DLC & Energy Star
- Operation from -35°C-70°C Full Load
- Certified to UL/cUL 8750, EN61347 & CE
- Short Circuit, Over Temperature & Over Voltage Protection
- IP67
- RoHS Compliant


SPECIFICATIONS

Model #	Output Current (5)	Output Voltage Range (5)	PF (2)		No Load Output Voltage	Ripple & Noise (3)	Efficiency (4)
			110VAC	277VAC			
LSWC-120S045ST	450mA	160-267V	0.99	0.9	284	8.0V	93.0%
LSWC-120S070ST	700mA	103-172V	0.99	0.9	181	5.1V	92.0%
LSWC-120S125ST	1250mA	58-96V	0.99	0.9	120	3.4V	91.0%
LSWC-120S140ST	1400mA	52-86V	0.99	0.9	90	2.6V	91.0%
LSWC-120S210ST	2100mA	34-57V	0.99	0.9	60	1.7V	90.0%
LSWC-120S280ST	2800mA	26-43V	0.99	0.9	45	1.3V	90.0%
LSWC-120S350ST	3500mA	21-34V	0.99	0.9	40	1.0V	90.0%
LSWC-120S500ST	5000mA	14-24V	0.99	0.9	30	0.7V	89.0%

Output	Line Regulation	1%	
	Load Regulation	3%	
	Turn-on Delay	0.8~1.2 s (Typ)	
Input	Rated Voltage Range	100-277 Vac	
	Frequency Range	47Hz ~63Hz	
	Inrush Current	65A cold start, Vin=230V	
	AC Current (Typ.)	1.25 A / 110 VAC, 0.61 A / 220 VAC @ full load	
	THD	≤20% @277Vac, 70% load	
	Leakage	0.75 mA Vin=277V, 50Hz	
	Protections	Short Circuit	Protection type : Hiccup mode, recovers automatically after fault condition is removed
Over Temperature		110°C internal temperature auto recovers after power supply cools	
Over Voltage (Typ.)		130% of max. output voltage Latch mode. The power supply shall return to normal operation after recycling AC.	
Environmental	Temperature Range	Operational	- 35°C - 70°C
		Storage	- 40 - 85°C
	Humidity	Operational	10% - 100% RH
		Storage	5% -100% R.H




Safety & EMC	Safety Standards	UL8750, UL935, UL1012, CSA-C22.2 NO. 107.1 EN61347-1 EN61347-2-13
	EMI Conduction & Radiation	EN55015
	EMS Immunity	EN61000-3-2, EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN61547
Others	MTBF	275,000 Hours
	Life Time	82,000 Hours
	Dimensions	(L*W*H) 7.40*3.07*1.46 inches / (L*W*H) 188.5*78*37mm
	Weight	900G



NOTES:

1. All specifications are typical at 25°C unless otherwise stated.
2. The values are measured at 70% load, after the unit is thermally stabilized.
3. The "Ripple & Noise" values are measured by 20MHz bandwidth oscilloscope and the output parallel a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor.
4. @220Vac.
5. ±5V
6. Measured at 220VAC




Mechanical Specification

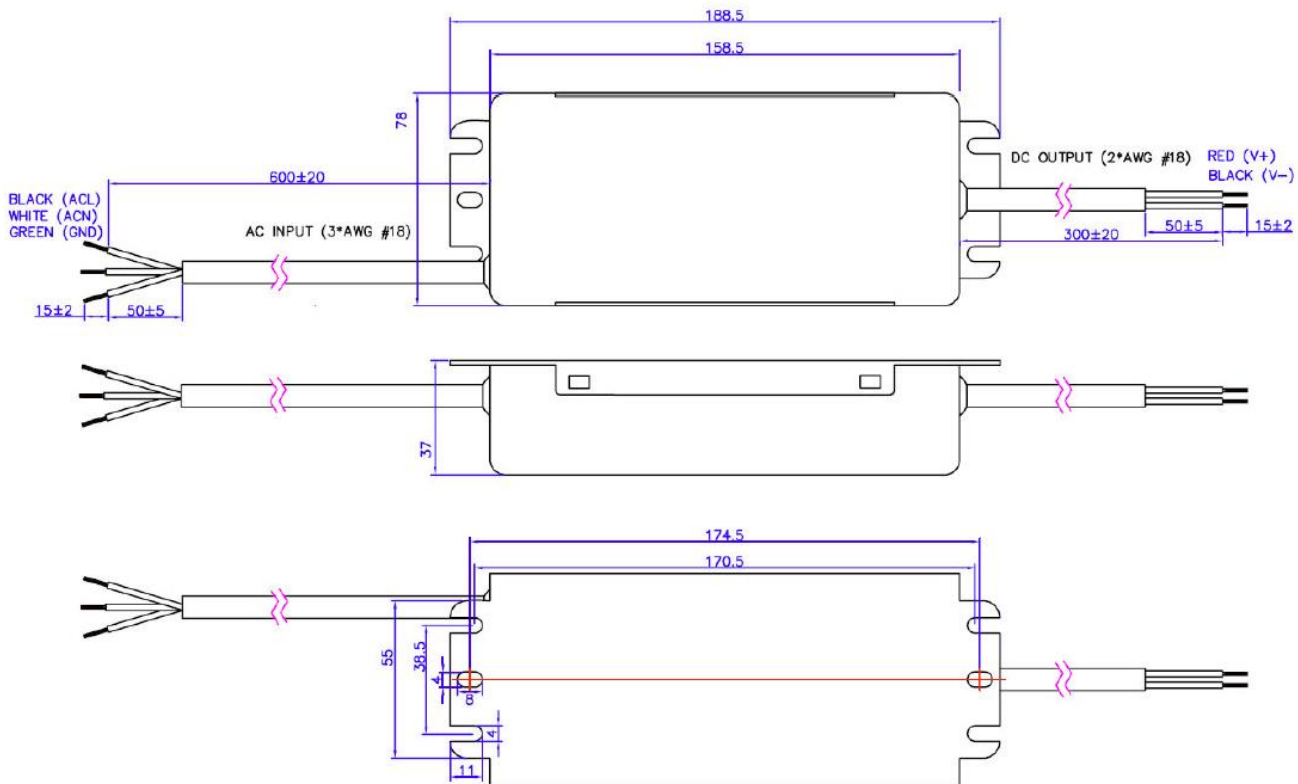




Derating Curves

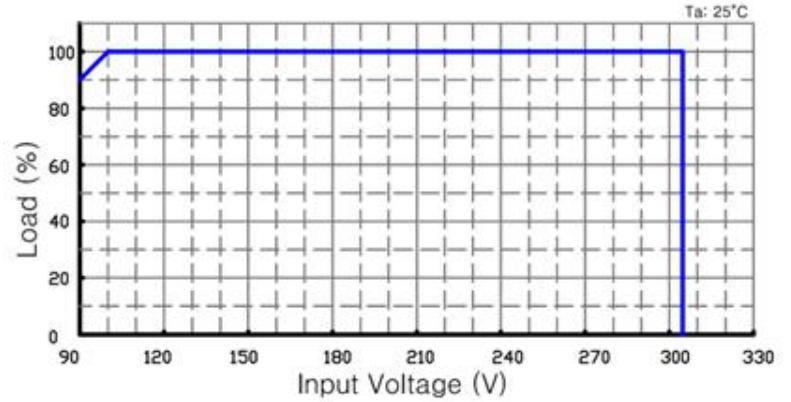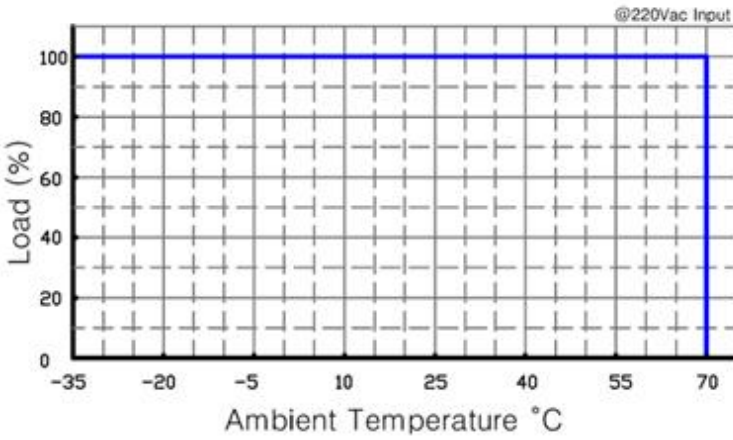


Power Factor Curves

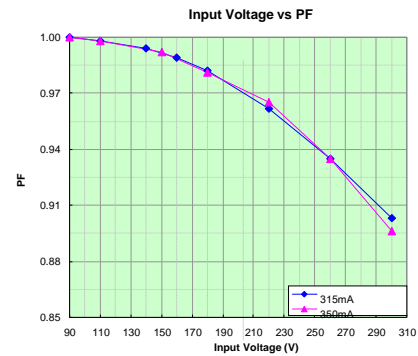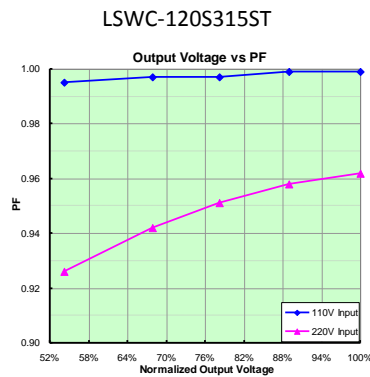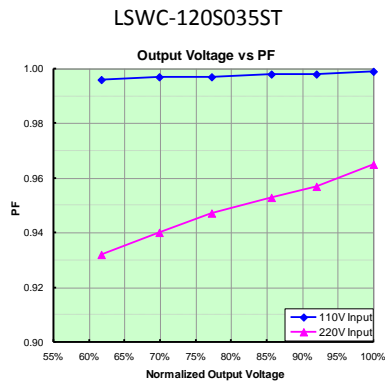

Efficiency vs Load

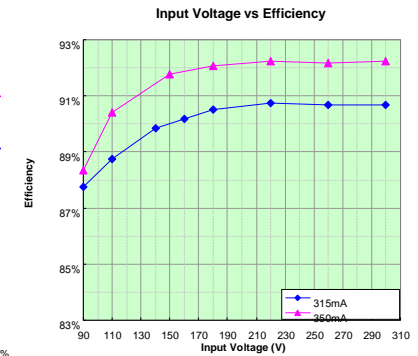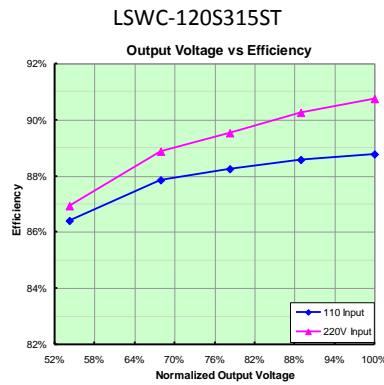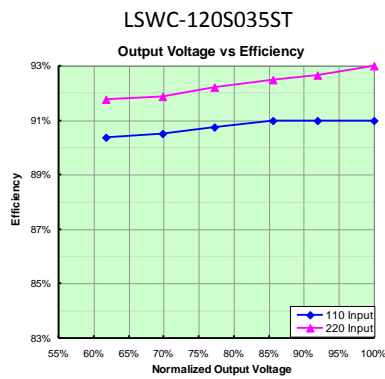

PART NUMBER SCHEME

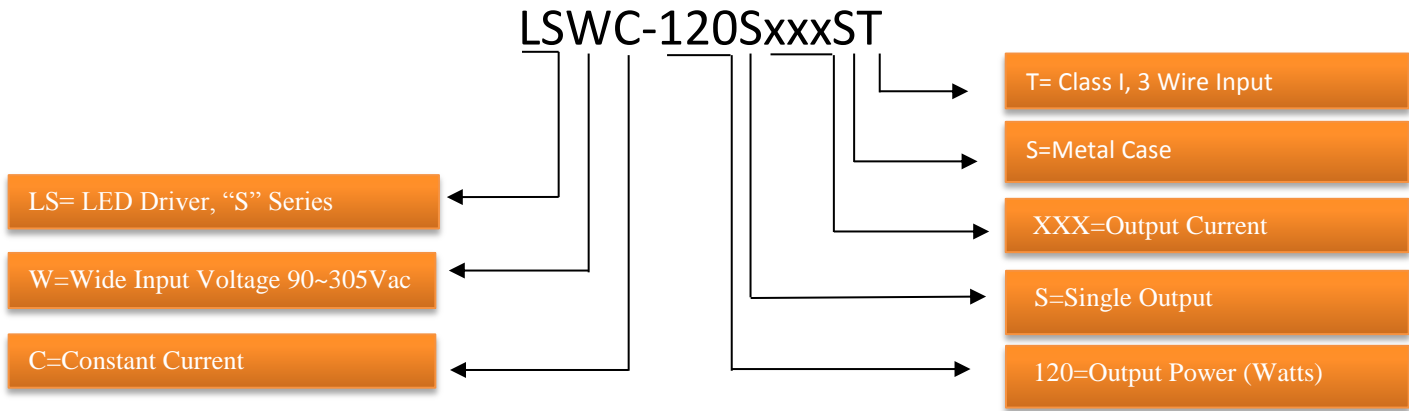

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AUTEC IS NOT RESPONSIBLE FOR ISSUES ARISING FROM ERRORS OR OMMISIONS

