
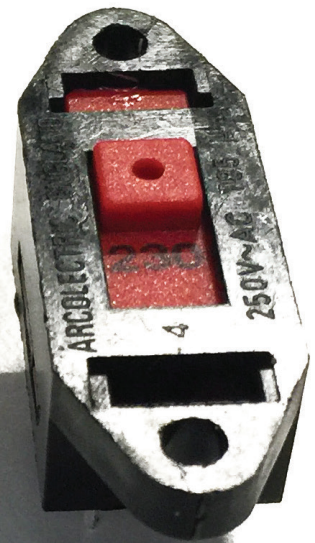



With up to 5 switching positions as well as multiple terminal, circuit and slider options, Bulgin's board mounted power slide switches can be configured to suit your needs. We also offer a wide range of voltage selector types that can be either snapped into a panel or flange mounted.

- Ratings up to 16A, 250V ac
- PCB and solder terminals
- Voltage Selector Models
- Snap in and flange mounting
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

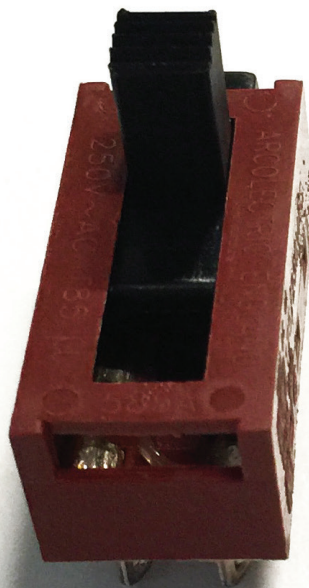

# 2000 Slide Switches - up to 5 position

10A 250Vac

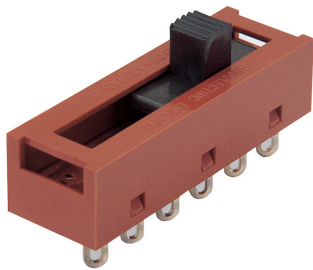

## Key Features

- Slide switches
- Ratings up to 16A, 250V ac
- PCB and solder terminals
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

## Approvals and specifications

- ☑ 10A 250Vac T85  
6(3)A 250Vac T85
  - ☑ UL CSA 16A 250Vac Non Inductive  
UL CSA 4A 300Vac  
UL 65°C, file no. E45221, CSA file no. LR10990
- μ contact gap  
Please specify: Standard action (SP116) or Light action (SP118).  
2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider
<p><b>K</b></p> <p>2.8 x 0.8</p> <p><b>R</b></p> <p>2.8 x 0.8</p> <p><b>T</b></p> <p>Solder</p> <p><b>X</b></p> <p>PCB 0.8 Sq.</p> <p><b>Y</b></p> <p>PCB 0.8 Sq.</p> <p>For mounting stability switches have extra "support" terminals</p> <p>* Nominal - Dimension varies with body type. For exact figure call sales</p>	<p><b>2</b></p> <p><b>3</b></p> <p><b>4</b></p> <p><b>5</b></p>	<p><b>2</b></p> <p>Switching positions</p> <p><b>3</b></p> <p>Switching positions</p> <p><b>4</b></p> <p>Switching positions</p> <p><b>5</b></p> <p>Switching positions</p>	<p><b>10</b></p> <p><b>20</b></p> <p><b>30</b></p> <p><b>40</b></p> <p><b>10</b></p> <p><b>20</b></p> <p><b>30</b></p> <p><b>40</b></p> <p><b>10</b></p> <p><b>20</b></p> <p><b>30</b></p> <p><b>40</b></p> <p><b>10</b></p> <p><b>20</b></p> <p><b>30</b></p> <p><b>40</b></p>	<p><b>0</b></p> <p><b>1</b></p> <p><b>2</b></p> <p><b>3</b></p> <p><b>4</b></p> <p><b>5</b></p> <p><b>6</b></p> <p><b>7</b></p> <p><b>9</b></p> <p><b>A</b></p> <p><b>B</b></p> <p><b>C</b></p> <p><b>D</b></p> <p><b>E</b></p> <p><b>G</b></p> <p><b>H</b></p> <p><b>J</b></p> <p><b>K</b></p> <p><b>L</b></p> <p><b>N</b></p> <p><b>P</b></p> <p><b>R</b></p> <p><b>S</b></p> <p><b>T</b></p>

## Examples



X22205C ---



T2220EC ---



T23206A ---



T24306A ---



T25302A ---



T25100A ---

### Body


**C** 2 positions




**H** 2 positions



**A** 3 positions



**H** 3 positions




**A** 4 positions



**H** 4 positions



**A** 5 positions




### Options

**Colour**  
Call sales for custom colours.  
A full range is available for large orders.


**Legend printing**  
A wide range is available  
For all options call sales

### Dimensions


**C** 2 positions




**H** 2 positions





**Cut-out / PCB Matrix**




**A** 3 positions





**H** 3 positions





**A** 4 positions



**H** 4 positions




**A** 5 positions



# 2000 Slide Switches - Snap fit and panel mount

10A 250Vac

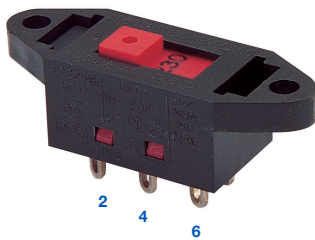

115/230 is preferred legend

## Key Features

- 2 way 'voltage selector'
- Ratings up to 16A, 250V ac
- Snap fit and panel mount
- PCB & solder terminals
- 2 and 3 position
- Choice of circuits
- Choice of actuators

## Approvals and specifications

10A 250Vac T85  
6(3)A 250Vac T85

UL CSA 16A 250Vac Non Inductive  
UL CSA 4A 300Vac  
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap

Please specify: Standard action (SP116) or Light action (SP118).

2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider			
<b>K</b>  2.8 x 0.8	<b>2</b>	<b>2</b> Switching positions	<b>10</b> 	<b>0</b>  <b>6</b>  <b>2</b>  <b>7</b>  <b>3</b>  <b>8</b>  <b>4</b>  <b>9</b>  <b>5</b>  <b>A</b>  <b>S</b> 			
			<b>20</b> 		<b>C</b>  <b>D</b>  <b>E</b>  <b>H</b>  <b>K</b>  <b>T</b> 		
			<b>30</b> 			<b>L</b>  <b>M</b>  <b>N</b>  <b>P</b>  <b>R</b> 	
			<b>40</b> 				
<b>10</b> 	<b>3</b> Switching positions						
<b>20</b> 							
<b>30</b> 							
<b>40</b> 							
<b>R</b>  2.8 x 0.8	<b>2</b>	<b>2</b> Switching positions	<b>10</b> 	<b>0</b>  <b>6</b>  <b>2</b>  <b>7</b>  <b>3</b>  <b>8</b>  <b>4</b>  <b>9</b>  <b>5</b>  <b>A</b>  <b>S</b> 			
					<b>20</b> 	<b>C</b>  <b>D</b>  <b>E</b>  <b>H</b>  <b>K</b>  <b>T</b> 	
					<b>30</b> 		<b>L</b>  <b>M</b>  <b>N</b>  <b>P</b>  <b>R</b> 
					<b>40</b> 		
<b>10</b> 	<b>3</b> Switching positions						
<b>20</b> 							
<b>30</b> 							
<b>40</b> 							
<b>T</b>  Solder	<b>2</b>	<b>2</b> Switching positions	<b>10</b> 	<b>0</b>  <b>6</b>  <b>2</b>  <b>7</b>  <b>3</b>  <b>8</b>  <b>4</b>  <b>9</b>  <b>5</b>  <b>A</b>  <b>S</b> 			
					<b>20</b> 	<b>C</b>  <b>D</b>  <b>E</b>  <b>H</b>  <b>K</b>  <b>T</b> 	
					<b>30</b> 		<b>L</b>  <b>M</b>  <b>N</b>  <b>P</b>  <b>R</b> 
					<b>40</b> 		
<b>10</b> 	<b>3</b> Switching positions						
<b>20</b> 							
<b>30</b> 							
<b>40</b> 							
<b>X</b>  PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales	<b>2</b>	<b>2</b> Switching positions	<b>10</b> 	<b>0</b>  <b>6</b>  <b>2</b>  <b>7</b>  <b>3</b>  <b>8</b>  <b>4</b>  <b>9</b>  <b>5</b>  <b>A</b>  <b>S</b> 			
					<b>20</b> 	<b>C</b>  <b>D</b>  <b>E</b>  <b>H</b>  <b>K</b>  <b>T</b> 	
					<b>30</b> 		<b>L</b>  <b>M</b>  <b>N</b>  <b>P</b>  <b>R</b> 
					<b>40</b> 		
<b>10</b> 	<b>3</b> Switching positions						
<b>20</b> 							
<b>30</b> 							
<b>40</b> 							


## Examples



### Body

#### B

With mounting holes





#### E

Snap fit



#### F

Snap fit  
(single pole ON OFF only)




### Options

#### Colour


Call sales for custom colours.  
A full range is available for large orders.  
Standard body colour is black.

### Dimensions



#### 2 Pos B



#### 3 Pos B





#### 2 Pos E



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

#### 2 Pos F



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65