



USB Connector A Type PCB R/A SMT (male)


SPECIFICATIONS

Materials

Insulator: PBT with glass fiber filled
 Flammability Rating: UL 94V-0
 Contacts: Phosphor bronze
 Shell: Steel, Nickel plated

Electrical

Insulation Resistance: 50 MΩ minimum
 Contact Resistance: 30 mΩ Max.
 Rating: 1A 100V AC
 3A 12V DC
 Dielectric Withstanding Voltage: 250V AC for one minute
 Withdrawal Force: 0.5kg-2.5kg

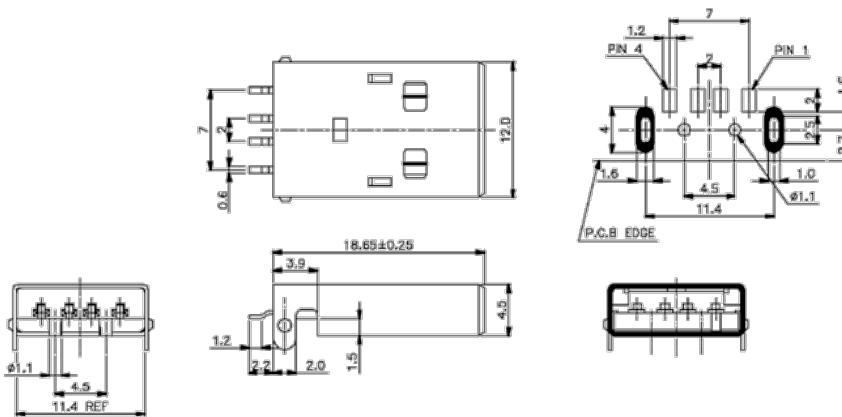

PCB LAYOUT (BOTTOM VIEW)

Order Information

33UBA RS1 - 04 P N 1
 1 2 3 4 5 6

1. Series No.
33UBA

3. No. Of Contacts
04: 4 pin

5. Insulator Color
N: Black
W: White

2. Terminal Version
RS1: R/A SMT

4. Connector Type
P: Male

6. Packaging
1: Packed in tray



File #: 127344



File #: LR97981