




SHEEL 1/1

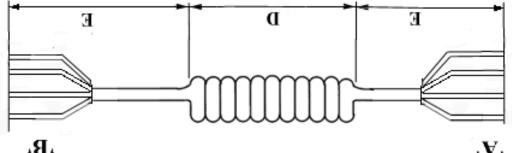

PACKING:

MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG. BULK PACKED, BUNDLES OF 25.

GENERAL SPECIFICATIONS:

SJT, # 18 AWG, 4 CONDUCTOR CABLE TYPE / SIZE: 10A / 300V AC :DNITAR

102°C

BLACK / WHITE / GREEN / RED

BLACK (SEE NOTE 2) CABLE JACKET COLOR:


152 ± 20mm LENGTH (E): LENGTH(D) OF COIL(RETRACTED): 330 ± 20 mm


mm 5 ± 52 COIL OUTER DIAMETER:

REMOVE OUTER JACKET (SEE TERMINATION TABLE), ENDS CUT BLUNT END B REMOVE OUTER JACKET (SEE TERMINATION TABLE), ENDS CUT BLUNT END , V,

:S3TON

SYMBOLS AND/ OR FILE NUMBERS. 1. CORD AND PLUG MUST BE MARKED WITH APPROVAL







2. MARKING TO BE PRINTED INTO CABLE JACKET

SSS1582F1SSSP(R)

,	\ . <i>/</i>
,	\ \ \ /
	\ I /
	\I/
	V-/
	~
	•

SCALE: NONE

05/15/09

APRVD: HM DATE:

FΛ. V				SIZE	G, CC FSCN No.:		TAT 'ATAA ZZNIZ	I		
DMG TITLE: NORTH AMERICAN NON-DETACHABLE					MILLIMETERS -/+ xx. 10/+ xxx.	05/15/09 DATE:	00 11411111	I		
(SelobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111					TOLERA DECIMALS .xxx +/- 0.1			_		
TABULATION BLOCK										
NOTES		DESCRIЬLION				ON TARA	DASH NO.]		

PART NO:

approval from the CEO of Globtek Inc. aircraft applications without prior written azzardous environment, nuclear or Globtek product are not authorized for use as

94

97

94

94

ROJ ± 3 mm

UL, CSA or cUL

tallation instruction. ole UL,CSA or EN Standards for proper product if unauthorized access and repair safety and performance of these power Globtek Inc. will not be liable for the

BED

CKEEN

BLACK

MHITE

COLOR

CONDUCTOR TERMINATION TABLE:

orior notice tre subject to change without

TINE #5

L# 3NI7

JARTU BI

WIRE

APPROVALS CABLE:

CONDUCTOR COLORS:

TEMPERATURE RATING:

GROUND