

Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

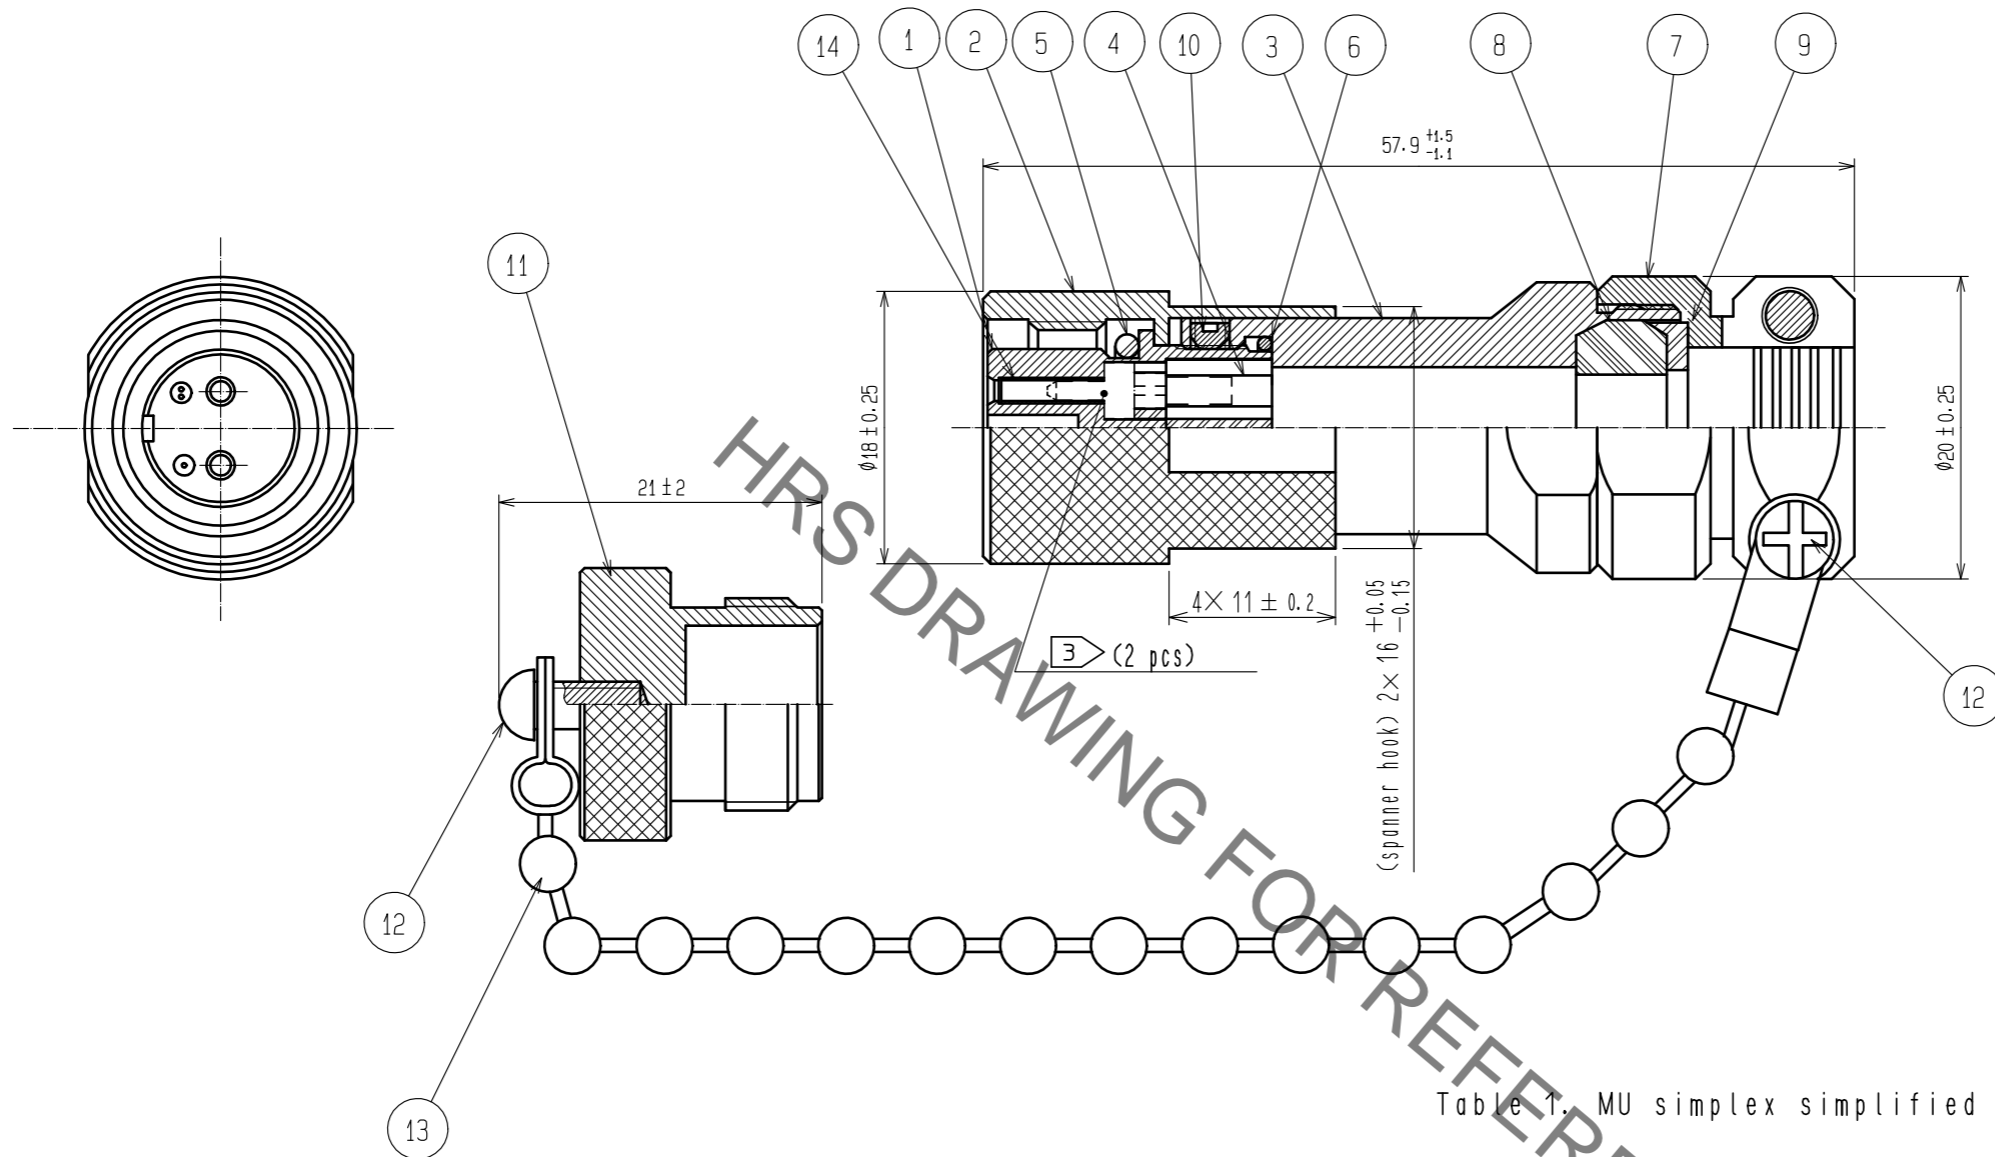



Table 1. MU simplex simplified plug (without hood) 3

- NOTE 1. The procedure of cable assemblies would be confirm to the ETAD-K0189.
2. When this plug is mated with a MF10S receptacle, the clamp torque of the part No. ② should be 1.5 to 3 N·m. Following MF10-T1 can be used as simple substitution of a torque wrench.

EXCLUSIVE PLASTIC SPANNER	PART NO.	CODE NO.
	MF10-T1	CL709-0205-8

3 The ferrule parts are not contained. Please use the 'MU simplex simplified plug' chosen from the Table 1 according to the outer diameter of the optical fiber.

Part No.	HRS CL No.	Ferrele Inner dia.
HMUA-FK-A125<01>	CL710-0099-2-01	$\phi 0.125^{+0.001}_0$
HMUA-FK-A1255<01>	CL710-0107-9-01	$\phi 0.1255^{+0.001}_0$
HMUA-FK-A126<01>	CL710-0100-0-01	$\phi 0.126^{+0.001}_0$

7	BRASS	CHROME PLATING	14	ZIRCONIA	
6	SYNTHETIC RUBBER		13	STAINLESS STEEL	
5	SYNTHETIC RUBBER		12	STAINLESS STEEL	NYELOCK
4	SYNTHETIC RESIN		11	ALUMINIUM ALLOY	ANODIC OXIDE COATING
3	ALUMINIUM ALLOY	ANODIC OXIDE COATING	10	STAINLESS STEEL	
2	BRASS	CHROME PLATING	9	SYNTHETIC RESIN	
1	ZINC DIECAST	CHROME PLATING	8	SYNTHETIC RUBBER	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	1				
APPROVED : MT. SHIBUTANI			18.03.16	DRAWING NO. EDC-175688-31-00		
CHECKED : FS. YOSHIDA			18.03.16	PART NO. MF10S-WP7C01-0200(31)		
DESIGNED : SI. MATSUMOTO			18.03.15	CODE NO. CL709-0203-2-31		
DRAWN : SR. TOYOKAWA			18.03.15			