


P.C.B. LAYOUT

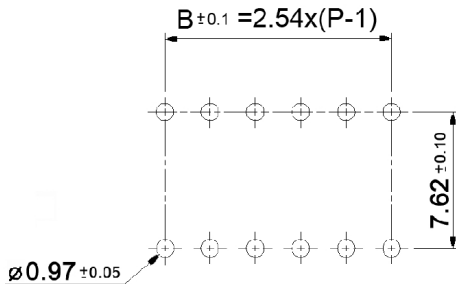

xx	Poles	A	B
02	2	6.64	2.54
03	3	9.18	5.08
04	4	11.72	7.62
05	5	14.26	10.16
06	6	16.80	12.70
07	7	19.34	15.24
08	8	21.88	17.78
09	9	24.42	20.32
10	10	26.96	22.86
12	12	32.04	27.94

Specifications:

- Contact rating: 25mA, 24V DC / 100mA, 6V DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 500V, 50Hz for the duration of 1 minute
- Operating temperature: -20°C to +70°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 2 000 cycles
- Soldering conditions: auto-soldering: max.: 260°C, 5sec.
- Mounting: on pc-board
- Slide position: off
- Material: PBT meets UL94V-0
- Contacts: gold plated over nickel



Tolerances:	Date	Name	<h1>DBP 21xx</h1>	<h2>30 15 78</h2>	Page 1/1
	08/08	dr			
			knitter-switch		
Modifications	Date	Name			