


- Note: Not end stackable.
- Accepts JEDEC PLCCs MO-047 & MO-052.
- Insulator material is glass reinforced PPS.
- Low profile for high density PC board stacking.
- Standoffs provide clearance for heat dissipation and cleaning.
- Contacts are plated with 150μ" tin.
- Pre-lubricated available. (See page 96 for specs.)

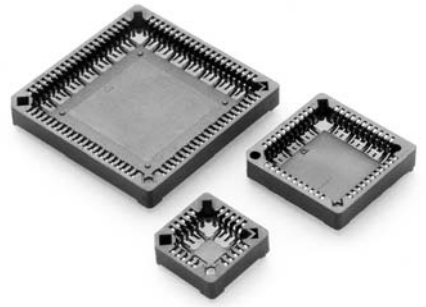

No. of contacts	A	B	C
20	0.613	0.200	0.334
28	0.713	0.300	0.434
32*	.813/.713	.400/.300	.534/.434
44	0.900	0.500	0.634
52	1.013	0.600	0.734
68	1.213	0.800	0.934
84	1.413	1.000	1.134

Ordering Information

- 940-44-020-17-40X00X
- 940-44-028-17-40X00X
- 940-44-032-17-40X00X
- 940-44-044-17-40X00X
- 940-44-052-17-40X00X
- 940-44-068-17-40X00X
- 940-44-084-17-40X00X

*RECTANGULAR



Plating Code
44 = 150μ" Sn

- X = 0 Not Lubricated
- X = 1 Pre-Lubricated
- X = 0 Tube Packaging
- X = 4 Tape and Reel

No. of Contacts	Quantity per Tube	Quantity per Reel
20	32	470
28	27	390
32	24	390
44	21	250
52	19	250
68	16	220
84	14	200