

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0444413006](#)
Status: **Active**
Overview: [Sabre Power Connector](#)
Description: 7.50mm Pitch Sabre Receptacle Housing, UL 94V-2, 6 Circuits, Glow-Wire Capable, Black

Documents:

3D Model	Test Summary 444410000-TS-000 (PDF)
Drawing (PDF)	Test Summary TS-44441-001-001 (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-44441-9999-001 (PDF)	Product Literature (PDF)
Packaging Specification PK-44441-001-001 (PDF)	

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Crimp Housings
Series	44441
Application	Power, Wire-to-Board, Wire-to-Wire
Comments	Positive mating lock and integrated Terminal Position Assurance (TPA) standard.
Overview	Sabre Power Connector
Product Name	Sabre
UPC	887191585147

Physical

Circuits (maximum)	6
Color - Resin	Black
Flammability	94V-2
Gender	Receptacle
Glow-Wire Capable	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Resin	Nylon
Net Weight	4.700/g
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	7.50mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +75°C

Electrical

Current - Maximum per Contact	18.0A
-------------------------------	-------


Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-44441-001-001
Product Specification	PS-44441-9999-001
Sales Drawing	444410000-SD-000
Test Summary	444410000-TS-000, TS-44441-001-001

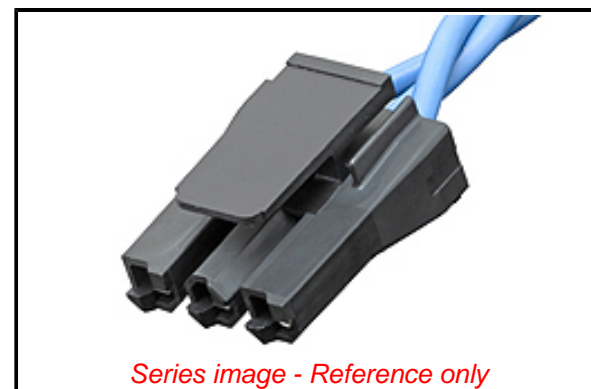

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ECHA_01_2020 (16
January 2020

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[44441 Series](#)

Mates With

Plug Housing [436803006](#), 6 Circuit, UL 94V-2 Vertical or Right Angle Headers [43160](#), 6 Circuit, UL 94V-2 Right Angle, UL1977 finger proof compliant [46007](#)

Use With

Female Crimp Terminals [43375](#)

This document was generated on 05/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION