

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [45970-5115](#)
Status: **Active**
Overview: [SEARAY*](#)
Description: 1.27mm by 1.27mm Pitch SEARAY* Plug, 500 Circuits, 2.00mm Unmated Height, 10 Rows, Lead-Free

Documents:

3D Model	Application Specification AS-45970-990 (PDF)
Drawing (PDF)	Test Summary TS-45970-001 (PDF)
Product Specification PS-45970-001 (PDF)	Test Summary TS-45970-002 (PDF)
Product Specification PS-45970-002 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification AS-45970-002 (PDF)	

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	45970
Application	Board-to-Board, Signal
Overview	SEARAY*
Product Name	SEARAY*

Physical

Breakaway	No
Circuits (Loaded)	500
Circuits (maximum)	500
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	10
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Pick and Place Cap
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	Yes

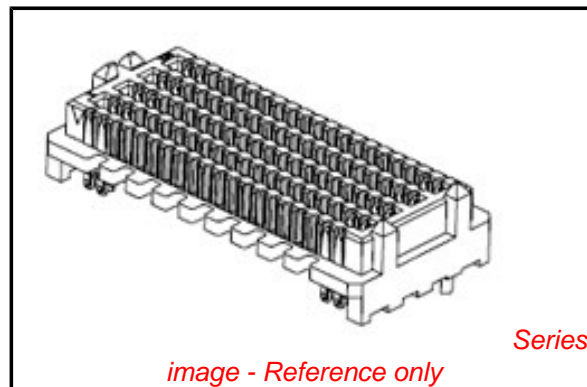

EU RoHS

ELV and RoHS Compliant
REACH SVHC Contains SVHC: No
Low-Halogen Status Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[45970Series](#)

Mates With

[45971 SEARAY* Receptacle](#)

Temperature Range - Operating	-55°C to +125°C
Termination Interface: Style	Surface Mount
Unmated Height	2.00mm

Electrical

Current - Maximum per Contact	2.7A
Voltage - Maximum	240V AC

Solder Process Data

Duration at Max. Process Temperature (seconds)	3
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info

UPC	883906607982
-----	--------------

Reference - Drawing Numbers

Application Specification	AS-45970-002, AS-45970-990
Product Specification	PS-45970-001, PS-45970-002
Sales Drawing	SD-45970-001
Test Summary	TS-45970-001, TS-45970-002

*SEARAY is a trademark of Samtec, Inc.

This document was generated on 06/28/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION