

Protective hose - WR/M40-25M - 1644889

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Protective hose, for protective house screw connection, packing volume: 25 m, M40



Key Commercial Data

Packing unit	1 pc
GTIN	4 017918 911195
GTIN	4017918911195

Technical data

Ambient conditions

General	
Material	PA
Flammability rating according to UL 94	НВ
Color	black
Bending radius, static	90.00 mm

-40 °C ... 110 °C

Standards and Regulations

Ambient temperature (operation)

	,
Flammability rating according to UL 94	HB

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings



Protective hose - WR/M40-25M - 1644889

Dimensional drawing

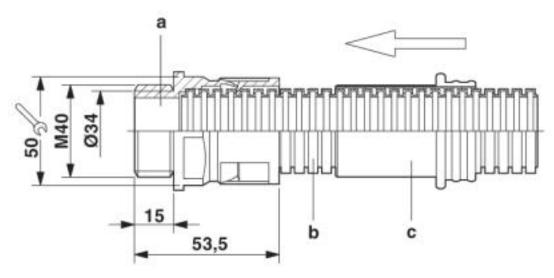

Assembly instructions for M40 corrugated pipe

a = Corrugated screw connection

b = Corrugated pipe

c = Opener

Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

Classifications

eCl@ss

eCl@ss 4.0	27141209
eCl@ss 4.1	27141209
eCl@ss 5.0	27149109
eCl@ss 5.1	27149100
eCl@ss 6.0	27140900
eCl@ss 7.0	27430201
eCl@ss 8.0	27430201
eCl@ss 9.0	27430304

ETIM

ETIM 2.0	EC000441
ETIM 3.0	EC000441
ETIM 4.0	EC000441
ETIM 5.0	EC001175
ETIM 6.0	EC001177

UNSPSC

UNSPSC 6.01	30211808



Protective hose - WR/M40-25M - 1644889

Classifications

UNSPSC

UNSPSC 7.0901	39121408
UNSPSC 11	39121408
UNSPSC 12.01	39121408
UNSPSC 13.2	39121408

Phoenix Contact 2020 @ - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany

Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com