

D-SUB sleeve housings - VS-09-T-20-1-S-S - 1655658

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




D-SUB sleeve housings, type: D-SUB 9, degree of protection: IP20, material: ABS, cable outlet: straight, size of housing: 1, color: Bare metallic

Your advantages

- D-SUB 4-40 UNC thread



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 029544
GTIN	4046356029544

Technical data

Material

Flammability rating according to UL 94	V0
Housing material	ABS
Flammability rating according to UL 94	V0
Housing material	ABS


Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Drawings

D-SUB sleeve housings - VS-09-T-20-1-S-S - 1655658

Dimensional drawing

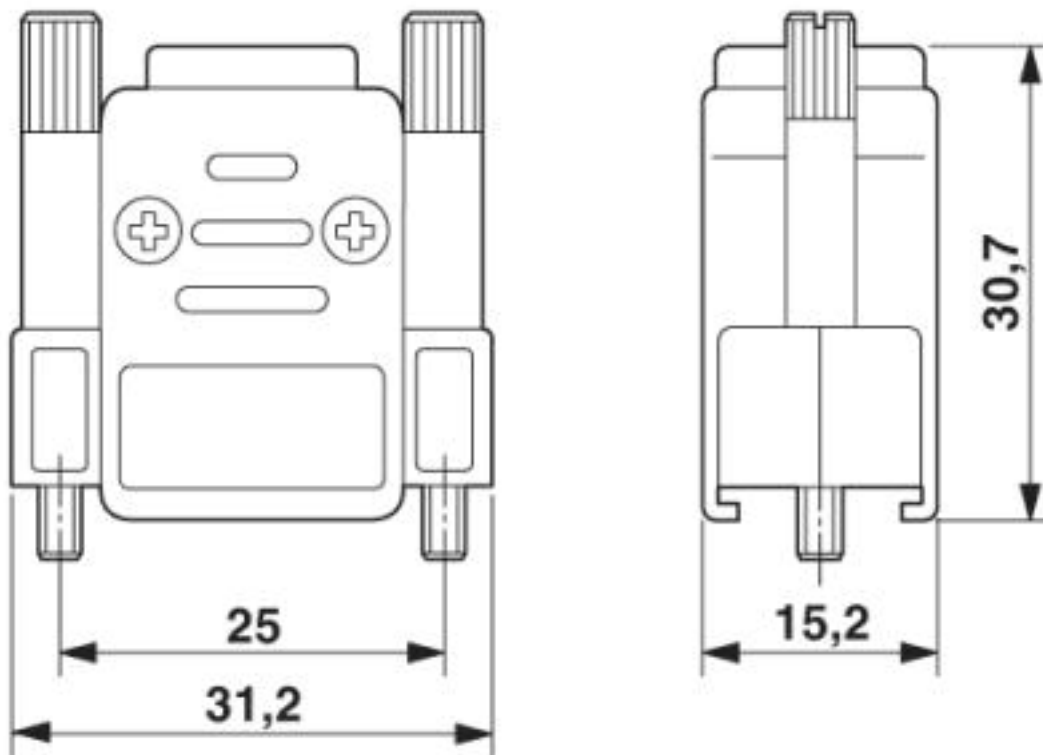

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27261200
eCl@ss 6.0	27261200
eCl@ss 7.0	27440202
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 2.0	EC001133
ETIM 3.0	EC001133
ETIM 4.0	EC001133
ETIM 5.0	EC000437
ETIM 6.0	EC000437

UNSPSC

UNSPSC 6.01	31261501
-------------	----------

D-SUB sleeve housings - VS-09-T-20-1-S-S - 1655658

Classifications

UNSPSC

UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 19.0	31261501

Accessories

Spare parts

D-SUB sleeve housings - CUC-DST-GPME-S/DSSC9 - 1419705



D-SUB sleeve housings, degree of protection: IP20, material: ABS, metal-plated, cable outlet: straight, size of housing: 1, color: Bare metallic

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>