

字体: :Arial

Physical Specification

Jack housing: Poly Butylene Terephthalate resin high-impact UL94V-2

Spring wire: Phosphor Bronze C5210R-H, t=0.3mm

50u" Gold over 70u" Nickel undercoat on contact area

180u" Tin over 70u" Nickel undercoat on solder area

IDC housing: Polycarbonate resin high-impact UL94V-2

IDC contact: Phosphor Bronze C5191R-H, t=0.4mm, 200u" Tin over 60u" Nickel undercoat

Insertion Life: 750 mating cycles with FCC compliant RJ-45 plug

Contact force: 100 grams with FCC compliant RJ-45 plug

Plug retention force: 11 lbf min


Durability: 200 termination cycles

Contact compatibility: Accommodates 22 to 26 AWG solid/24 AWG stranded

Operating Temperature Range: -10°C to 60°C

Storage Temperature Range: -40°C to 68°C

Humidity: 10%~90%RH

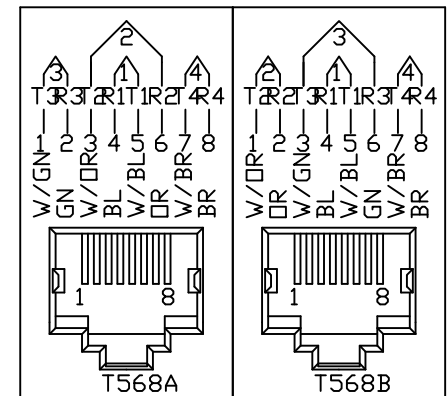

Scale	1:1		Quest Technology Int'l, Inc 11200NW 138th st, Medley, FL33178
3rd Angle Projection			
Unit	mm	Part no. NPP-5016X	
Date	2011.12.21	Title: 16 PORT CAT5E 110 IDC, 568A/B	
Tolerance		Title: PATCH PANEL, UL	
~20	~50	~150	150~
±0.2	±0.4	±0.5	±1.5
		ALGLE	2°
Drawn by		Checked by	Drawing No.