


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
F1	25				W	REACTIVATE: 2/4; EC ON20-0039-97	01DEC97	DD EH

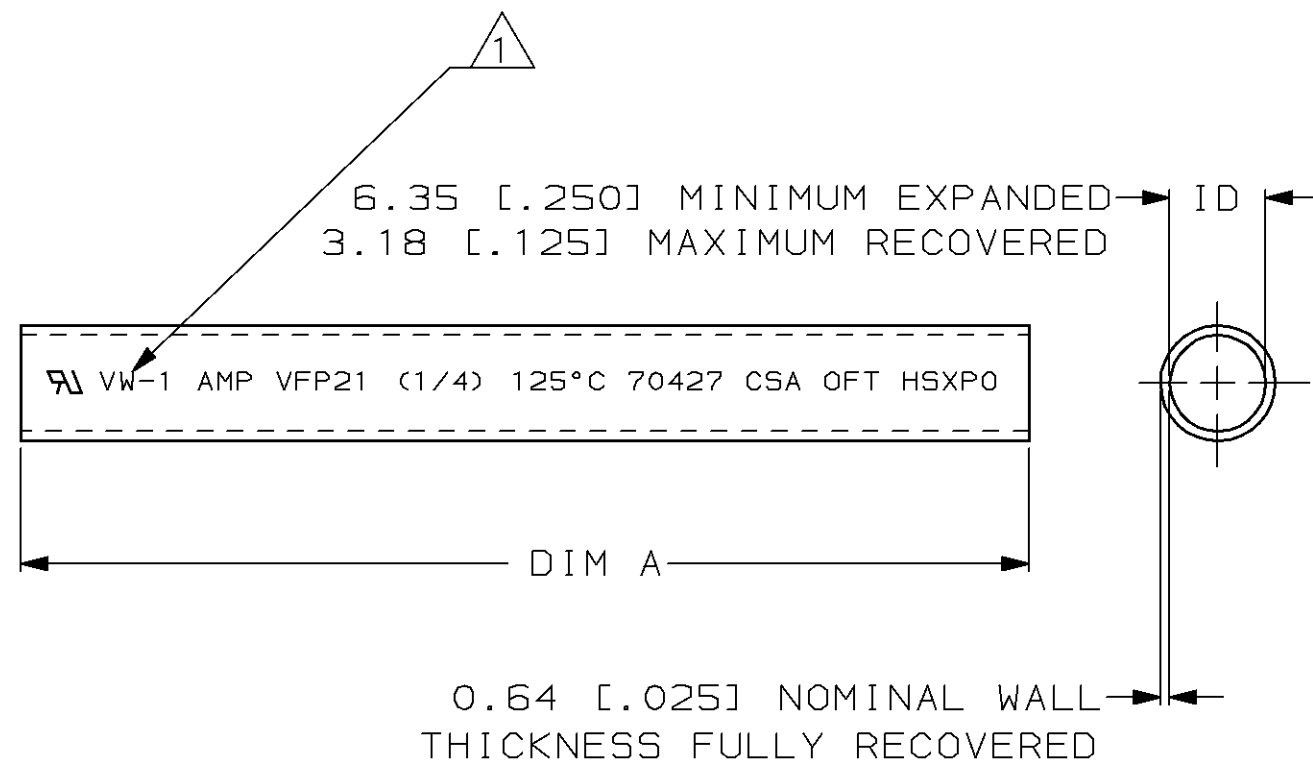

- ① TUBING VFP21 MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED.
- ② TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], AND MEETS VW-1 FLAME TEST.
- ③ TUBING VFP21 IS CSA CERTIFIED AND MEETS OFT FLAME TEST.
- ④ TUBING FP21 IS UNMARKED AND MEETS REQUIREMENTS OF MIL-I-23053/5-106-0.
- ⑤ WEIGHT PER LINEAR FOOT: 304.8 mm: 2.54 GRAMS/.006 POUND.

④	④	60.96 m [200 FEET] MINIMUM	2-603326-7
② ④ ③	④ ①	60.96 m [200 FEET] MINIMUM	2-603326-6
④	④	31.75±1.52 [1.25±.06]	2-603326-4
② ④ ③	④ ①	30.48 m [100 FEET] MINIMUM	2-603326-2
④	④	30.48 m [100 FEET] MINIMUM	2-604326-1
④	④	1.22 m [4 FEET] MINIMUM	1-603326-1
② ④ ③	① ④	25.4±1.52 [1.00±.06]	603326-7
② ② ③ ③	① ①	304.8 ±3.05 [12.00±.12]	603326-4
② ③	①	1.22 m [4 FEET] MINIMUM	603326-1
SEE NOTES	MARKING	DIM A	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 6-24-94 W CHANDLER	AMP Incorporated Harrisburg, PA 17105-3608	
	CHK 1-25-95 D HUSSEY		
MATERIAL  BLACK POLYOLEFIN	APPD 2-1-95 D KAAT	NAME  AMPSULATION VPF21 AND FP21, 1/4 INCH ID, BLACK	
	APPD 2-1-95 F HARNED	PRODUCT SPEC -	
FINISH  -	APPLICATION SPEC -	SIZE C	CAGE CODE 00779
	WEIGHT ⑤	DRAWING NO G=603326	SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

603326