
								ı	REVISI	ONS												
LTR					[DESCR	IPTIO	٧					DA	ATE (Y	R-MO-	DA)		APP	ROVED)		
А			ce type ade tec									nge	89-05-03			M. A. Frye						
В		ed devi	ce type	03. Te	echnica	l chang	ges in t	able I.	Editori	al chan	ges		90-05-10			M. A. Frye						
С	Upd Edi	ate the torial ch	boilerpl anges	late to o	current hout. –	require jak	ements	as spe	ecified i	in MIL-PRF-38535. 06-07-12			Thomas M. Hess									
REV SHEET REV SHEET REV STATU	S			REV	/		С	С	C	C	С	C	С	C	C	C	C					
OF SHEETS				SHEET 1 2 3			3	4	5	6	7	8	9	10	11							
PMIC N/A				PRE	PARED Mar) BY cia B. K	(ellehe	r			DI					NTEF O 432			US			
MICR	ANDA OCIR RAWIN	CUIT		CHE	CKED Thor	BY nas J. F	Ricciuti			COLUMBUS, OHIO 43218-3990 http://www.dscc.dla.mil												
THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS			APPROVED BY Michael A. Frye			MICROCIRCUIT, DIGITAL, FAST CMOS, 8-BIT IDENTITY COMPARATOR, TTL COMPATIBLE, MONOLITHIC SILICON																
AND AGI DEPARTM				DRA	WING . 88-0	APPRC 18-23	OVAL C	ATE			/ \		_,			5 011		•				
Α.	Mec N	\		REV	ISION	LEVEL					ZE •		GE CC			5	962-	-885	43			
AMSC N/A			l.	1							•	-	5962-88543									
			j			•	,			SHE	4		0/20	8								

DSCC FORM 2233 APR 97

1. SCOPE

- $1.1~\underline{\text{Scope}}$. This drawing describes device requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A.
 - 1.2 Part or Identifying Number (PIN). The complete PIN is as shown in the following example:



1.2.1 <u>Device type(s)</u>. The device type(s) identify the circuit function as follows:

Device type	Generic number	<u>Circuit function</u>
01	54FCT521	8-bit identity comparator, TTL compatible
02	54FCT521A	8-bit identity comparator, TTL compatible
03	54FCT521B	8-bit identity comparator, TTL compatible

1.2.2 <u>Case outline(s)</u>. The case outline(s) are as designated in MIL-STD-1835 and as follows:

Outline letter	<u>Descriptive designator</u>	<u>Terminals</u>	Package style
R S	GDIP1-T20 or CDIP2-T20 GDFP2-F20 or CDFP3-F20	20 20	Dual-in-line Flat pack
2	CQCC1-N20	20	Square leadless chip carrier

- 1.2.3 Lead finish. The lead finish is as specified in MIL-PRF-38535, appendix A.
- 1.3 Absolute maximum ratings. 1/

1.4 Recommended operating conditions.

Supply voltage range (V _{CC})	. +4.5 V dc to +5.5 V dc
Maximum low level input voltage (V _{IL})	. 0.8 V dc
Minimum high level input voltage (V _{IH})	. 2.0 V dc
Case operating temperature range (T _C)	

- 1/ Unless other wise specified, all voltages are referenced to ground.
- 2/ For $V_{CC} > 6.5 \text{ V}$ dc, the upper bound is limited to V_{CC} .
- $\underline{3}$ / Must withstand the added P_D due to short circuit test, e.g., I_{OS}.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88543
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990		REVISION LEVEL C	SHEET 2

APR 97
Downloaded from Arrow.com.

2. APPLICABLE DOCUMENTS

2.1 <u>Government specification, standards, and handbooks</u>. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.

MIL-STD-1835 - Interface Standard Electronic Component Case Outlines.

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.

MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http:

2.2 <u>Order of precedence</u>. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

- 3.1 <u>Item requirements</u>. The individual item requirements shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein. Product built to this drawing that is produced by a Qualified Manufacturer Listing (QML) certified and qualified manufacturer or a manufacturer who has been granted transitional certification to MIL-PRF-38535 may be processed as QML product in accordance with the manufacturers approved program plan and qualifying activity approval in accordance with MIL-PRF-38535. This QML flow as documented in the Quality Management (QM) plan may make modifications to the requirements herein. These modifications shall not affect form, fit, or function of the device. These modifications shall not affect the PIN as described herein. A "Q" or "QML" certification mark in accordance with MIL-PRF-38535 is required to identify when the QML flow option is used.
- 3.2 <u>Design, construction, and physical dimensions</u>. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535, appendix A and herein.
 - 3.2.1 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.
 - 3.2.2 <u>Terminal connections</u>. The terminal connections shall be as specified on figure 1.
 - 3.2.3 Truth table. The truth table shall be as specified on figure 2.
 - 3.2.4 Logic diagram. The logic diagram shall be as specified on figure 3.
 - 3.2.5 Switching waveforms and test circuit. The switching waveforms and test circuit shall be as specified on figure 4.
- 3.3 <u>Electrical performance characteristics</u>. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full case operating temperature range.
- 3.4 <u>Electrical test requirements</u>. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88543
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990		REVISION LEVEL C	SHEET 3

- 3.5 <u>Marking</u>. Marking shall be in accordance with MIL-PRF-38535, appendix A. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device.
- 3.5.1 <u>Certification/compliance mark.</u> A compliance indicator "C" shall be marked on all non-JAN devices built in compliance to MIL-PRF-38535, appendix A. The compliance indicator "C" shall be replaced with a "Q" or "QML" certification mark in accordance with MIL-PRF-38535 to identify when the QML flow option is used.
- 3.6 <u>Certificate of compliance</u>. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6 herein). The certificate of compliance submitted to DSCC-VA prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-PRF-38535, appendix A and the requirements herein.
- 3.7 <u>Certificate of conformance</u>. A certificate of conformance as required in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.
 - 3.8 Notification of change. Notification of change to DSCC-VA shall be required for any change that affects this drawing.
- 3.9 <u>Verification and review</u>. DSCC, DSCC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

STANDARD
MICROCIRCUIT DRAWING

DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990

SIZE A		5962-88543
	REVISION LEVEL C	SHEET 4

TABLE I.	Flectrical	performance	characteristics.
1 / \DLL 1.		portorrianto	orial actoristics.

	1		1					
Test	Symbol	Conditions $-55^{\circ}C \le T_{C} \le +125^{\circ}C$ $V_{CC} = 5.0 \text{ V dc } \pm 10\%$ unless otherwise specified	Device type	V _{CC}	Group A subgroups	Limits		Unit
						Min	Max	
High level output voltage	V _{OH}	$V_{IL} = 0.8 \text{ V}$ $V_{IH} = 2.0 \text{ V}$ $I_{OH} = -300 \mu\text{A}$	All	4.5 V	1, 2, 3	4.3		V
		$V_{IL} = 0.8 \text{ V}$ $V_{IH} = 2.0 \text{ V}$ $I_{OH} = -12 \text{ mA}$	All	4.5 V		2.4		
Low level output voltage	V _{OL}	$V_{IL} = 0.8 \text{ V}$ $V_{IH} = 2.0 \text{ V}$ $I_{OL} = 300 \mu\text{A}$	All	4.5 V	1, 2, 3		0.2	٧
		$V_{IL} = 0.8 \text{ V}$ $V_{IH} = 2.0 \text{ V}$ $I_{OL} = 32 \text{ mA}$	All	4.5 V			0.5	
Input clamp voltage	V _{IK}	I _{IN} = -18 mA	All	4.5 V	1		-1.2	V
High level input current	I _{IH}	V _{IN} = 5.5 V	All	5.5 V	1, 2, 3		5.0	μА
Low level input current	I _{IL}	V _{IN} = GND	All	5.5 V	1, 2, 3		-5.0	μА
Short circuit output current	I _{os}	V _{OUT} = 0.0 V <u>1</u> /	All	5.5 V	1, 2, 3	-60		mA
Quiescent power supply current (CMOS inputs)	I _{CCQ}	$V_{IN} \le 0.2 \text{ V or } V_{IN} \ge 5.3 \text{ V}$ $f_i = 0 \text{ MHz}$ $V_{IN} = 3.4 \text{ V}$	All	5.5 V	1, 2, 3		1.5	mA
Quiescent power supply current (TTL inputs)	Δl _{CC}	<u>2</u> /	All	5.5 V	1, 2, 3		2.0	mA
Dynamic power supply current	I _{CCD}	$V_{IN} \le 0.2 \text{ V or } V_{IN} \ge 5.3 \text{ V}$ Outputs open One bit toggling 50% duty cycle	All	5.5 V	<u>3</u> /		0.25	mA/ MHz
Total power supply current	I _{cc} <u>4</u> /	$V_{IN} \le 0.2 \text{ V or } V_{IN} \ge 5.3 \text{ V}$ Outputs open One bit toggling 50% duty cycle $f_{CP} = 10 \text{ MHz}$	All	5.5 V	1, 2, 3		4.0	mA
		V_{IN} = 3.4 V or V_{IN} = GND Outputs open One bit toggling 50% duty cycle f_{CP} = 10 MHz	All	5.5 V	1, 2, 3		5.0	mA
Input capacitance	C _{IN}	See 4.3.1c	All		4		10	pF
Output capacitance	C _{OUT}	See 4.3.1c	All	<u> </u>	4		12	pF
Functional tests		See 4.3.1d	All		7, 8			

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88543
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990		REVISION LEVEL C	SHEET 5

TABLE I. Electrical performance characteristics - Continued

Test	Symbol	$ \begin{array}{c} Conditions \\ -55^{\circ}C \leq T_{C} \leq +125^{\circ}C \\ V_{CC} = 5.0 \ V \ dc \ \pm 10\% \\ unless \ otherwise \ specified \end{array} $	Device type	V _{CC}	Group A subgroups	Lin	nits	Unit
		·				Min	Max	
Propagation_delay time,	t _{PLH1} ,	$C_L = 50 \text{ pF}$	01	5.0 V	9, 10, 11	1.5	15	ns
An, Bn to O $(A = B)$	t _{PHL1}	$R_L = 500\Omega$	02	1	·	1.5	9.5	
	<u>5</u> /	See figure 4	03	1	i	1.5	7.3	
Propagation delay time,	t_{PLH2} ,	C _L = 50 pF	01	5.0 V	9, 10, 11	1.5	9.0	ns
I(A = B) to $O(A = B)$	t _{PHL2}	$R_L = 500\Omega$	02	1	·	1.5	7.8	
	<u>5</u> /	See figure 4	03			1.5	6.0	

- 1/ Not more than one output should be shorted at one time and the duration of the short circuit condition should not exceed 1 second.
- $\underline{2}$ / TTL driven input (V_{IN} = 3.4 V); all other inputs at V_{CC} or GND.
- 3/ This parameter is not directly testable but is derived for use in total power supply calculations.

 N_T = Number of TTL inputs at D_H .

 f_1 = Input frequency in MHz.

 N_I = Number of inputs at f_I .

5/ Minimum limits shall be guaranteed, if not tested, to the limits specified in table I.

STANDARD		
MICROCIRCUIT DRAWING		
DEFENSE SUPPLY CENTER COLUMBUS		

COLUMBUS, OHIO 43218-3990

SIZE 5962-88543 Α **REVISION LEVEL** SHEET С 6

Device types	01, 02, and 03
Case outlines	R, S, and 2
Terminal number	Terminal symbol
	_
1	(A = B)
2	A0
3	В0
4	A1
5	B1
6	A2
7	B2
8	A3
9	В3
10	GND
11	A4
12	B4
13	A5
14	B5
15	A6
16	В6
17	A7
18	В7
19	O (A = B)
20	V _{CC}

Terminal symbol	Description	
A0 – A7	Word A inputs	
B0 – B7	Word B inputs	
$\overline{I}(A = B)$	Enable input (active low)	
O (A = B)	Identity output (active low)	

FIGURE 1. <u>Terminal connections</u>.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88543
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990		REVISION LEVEL C	SHEET 7

Device types 01, 02, and 03			
Device type	es o i, oz, an	0 03	
Inputs		Output	
Data	Enable	\overline{O} (A = B)	
A, B	$\overline{I}(A = B)$		
A = B*	L	L	
A≠B	L	Н	
A = B*	Н	Н	
A≠B	Н	Н	

L = Low voltage level

H = High voltage level

* = A0 = B0, A1 = B1, A2 = B2, etc.

FIGURE 2. Truth table.



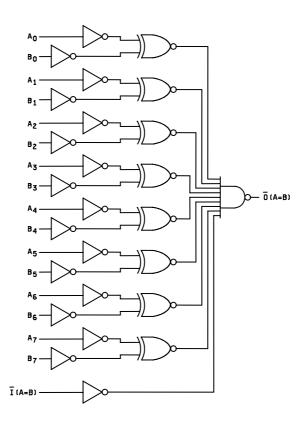


FIGURE 3. Logic diagram.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88543
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990		REVISION LEVEL C	SHEET 8

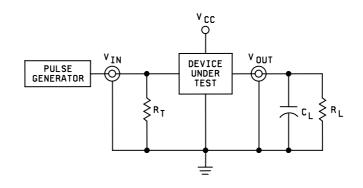

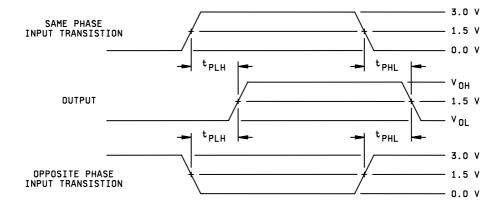

NOTES:

- 1. C_L = 50 pF or equivalent (includes test jig and probe capacitance).
- 2. $R_L = 500\Omega$ or equivalent.
- 3. $R_T = 50\Omega$ or equivalent, terminal resistance which should be equal to Z_{OUT} of the pulse generator.
- 4. Pulse generator for all inputs: $t_r \le 2.5 \text{ ns}$; $t_f \le 2.5 \text{ ns}$.

FIGURE 4. Switching waveforms and test circuit.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88543
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990		REVISION LEVEL C	SHEET 9

4. VERIFICATION

- 4.1 <u>Sampling and inspection</u>. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.
- 4.2 <u>Screening</u>. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:
 - a. Burn-in test, method 1015 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.
 - (2) $T_A = +125^{\circ}C$, minimum.
 - b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)
Interim electrical parameters (method 5004)	
Final electrical test parameters (method 5004)	1*, 2, 3, 7, 8, 9, 10, 11
Group A test requirements (method 5005)	1, 2, 3, 4, 7, 8, 9, 10, 11
Groups C and D end-point electrical parameters (method 5005)	1, 2, 3

^{*} PDA applies to subgroup 1.

- 4.3 <u>Quality conformance inspection</u>. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.
 - 4.3.1 Group A inspection.
 - a. Tests shall be as specified in table II herein.
 - b. Subgroups 5 and 6 in table I, method 5005 of MIL-STD-883 shall be omitted.
 - c. Subgroup 4 (C_{IN} and C_{OUT} measurements) shall be measured only for the initial test and after process or design changes which may affect input capacitance. Test all applicable pins on 5 devices with zero failures.
 - d. Subgroup 7 and 8 tests shall include verification of the truth table as specified on figure 2.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88543
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990		REVISION LEVEL C	SHEET 10

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.
 - (2) $T_A = +125^{\circ}C$, minimum.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

5. PACKAGING

- 5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535, appendix A.
- 6. NOTES
- 6.1 <u>Intended use</u>. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.
- 6.2 <u>Replaceability</u>. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.
- 6.3 <u>Configuration control of SMD's</u>. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished using DD Form 1692, Engineering Change Proposal.
- 6.4 <u>Record of users</u>. Military and industrial users should inform Defense Supply Center Columbus (DSCC) when a system application requires configuration control and the applicable SMD. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-0544.
- 6.5 <u>Comments</u>. Comments on this drawing should be directed to DSCC-VA, Columbus, Ohio 43218-3990, or telephone (614) 692-0547.
- 6.6 <u>Approved sources of supply</u>. Approved sources of supply are listed in MIL-HDBK-103. The vendors listed in MIL-HDBK-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DSCC-VA.

STANDARD MICROCIRCUIT DRAWING	SIZE A		5962-88543
DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43218-3990		REVISION LEVEL C	SHEET 11

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 06-07-12

Approved sources of supply for SMD 5962-88543 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This information bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535. DSCC maintains an online database of all current sources of supply at http://www.dscc.dla.mil/Programs/Smcr/.

Standard	Vendor	Vendor
microcircuit drawing	CAGE	similar
PIN <u>1</u> /	number	PIN <u>2</u> /
5962-8854301RA	0C7V7	54FCT521DMQB
5962-8854301SA	0C7V7	54FCT521FMQB
5962-88543012A	0C7V7	54FCT521LMQB
5962-8854302RA	<u>3</u> /	54FCT521A
5962-8854302SA	<u>3</u> /	54FCT521A
5962-88543022A	<u>3</u> /	54FCT521A
5962-8854303RA	<u>3</u> /	54FCT521B
5962-8854303SA	<u>3</u> /	54FCT521B
5962-88543032A	<u>3</u> /	54FCT521B

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed, contact the vendor to determine its availability.
- <u>2</u>/ <u>Caution</u>. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.
- 3/ Not available from and approved source of supply.

Vendor CAGE __number_

0C7V7

and address

QP Semiconductor

Vendor name

2945 Oakmead Village Court Santa Clara, CA 95051

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.