


## **Dimensions:** [mm]








# detail B V/////// Bellved edge 0,3 ±0,2 around 3,5 ±0,2 sectional drawing A-A M 10 11,0 ŝ В 40000

Scale - 1:1

RoHS

## **Drillhole specification for PCB:**

Drill hole specification for chemical s

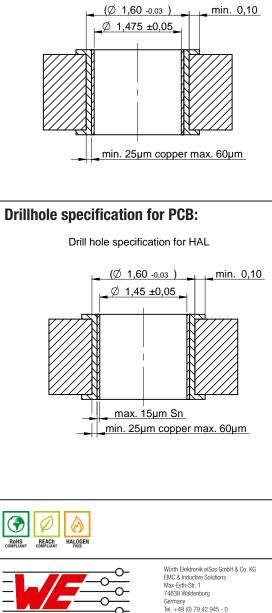

## Properties:

В:	Properties:								
	Properties	Tes	t conditions	Value	Unit	Tol.			
al surfaces	Material	Bras	Brass						
min. 0,10	Surface	Tin	Tin						
	Execution	Pres	Press-Fit						
	Tightening Torque			17	7 Nm				
77777	Insertion Force			40	N per Pin	min.			
	Extraction Force <sup>1)</sup>			30	N per Pin	min.			
	PCB Thickness min			1.6	mm				
	PCB Thickness max			3.2	mm				
	Rated Current	@ 2	20 °C	320	A	max.			
	Operating curren	t depends on P	CB, cable lug and	l cross section of	the cable				
<u>max. 60µm</u>	<sup>1)</sup> min. 24hours after Press-Fit	t Process							
	Certification:								
B:	RoHS Approval		Compliant [ 2011/65/EU&2015/863 ]						
	REACh Approval		Conform or declared [ (EC)1907/2006 ]						
HAL	Halogen Free	ogen Free		Conform [ IEC 61249-2-21 ]					
Halogen Free			Conform [ JEDEC JS709B ]						
min. 0,10	General Informatio	on							
	Operating Temperature		-55 up to +150 °C						
	Storage Conditions (in original packaging)	ginal	< 40 °C;< 75 % RH						
	Storage Conditions (for signal parts)	ngle	0 °C up to +40 °C; up to 75 %						
	Moisture Sensitivity Level	(MSL)	1						
<u>r max. 60µm</u>									
	1 1 1	DATE (YYYY-MM-DD)	GENERAL TOLERANCE	PROJECTION METHOD	- 10	5			
	SuPe 001.002	2019-09-23	DIN ISO 2768-1m		276	ピ			
	DESCRIPTION								
	WP-BUTR REDO	CUBE PRE	SS-FIT						
ktronik eiSos GmbH & Co. KG ductive Solutions -Str. 1 aldenburg					ORDER CODE 7461058				
Germany Tel. +49 (0) 79 42 945 - 0 SIZE/TYPE			BUSINESS UNIT	STATUS		PAGE			
online.com	Terminals with internal thread and								

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

WÜRTH ELEKTRONIK

### **Cautions and Warnings:**

## The following conditions apply to all goods within the product series of WP-BUTR of Würth Elektronik eiSos GmbH & Co. KG:

### **General:**

All recommendations according to the general technical specifications of the data-sheet have to be complied with.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer.

### **Product Specific:**

Follow all instructions in the datasheet, especially:

- Drill-hole specifications.
- Wave and reflow soldering is not applicable.
- The maximum permissible torques must be complied with to prevent mechanical destruction.
- While press-fit process PCB should be supported against bending.
- Chip formation due to material displacement is permitted.

		CHECKED SuPe	REVISION 001.002	DATE (YYYY-MM-DD) 2019-09-23	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		€-		
Rohs Reach HALOGEN Würth Elektronik eiSos GmbH & Co. KG			WP-BUTR REDCUBE PRESS-FIT								
					ORDER CODE	1058					
	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE Terminals with plate	internal thread a	nd two rows pin-	BUSINESS UNIT eiCan	status Valid		1	PAGE 2/3		

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be information network etc... Wurth Elektronik elSos GmbH & Co KG must be information intended for use age before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performation network etc... Wurth Elektronik elSos GmbH & Co KG must be information entrol, submarine, transportation signal, disaster prevention, medical, public information network etc... Wurth Elektronik elSos GmbH & Co KG must be information entrol, submarine, transportation signal, disaster prevention, medical, public information network etc... Wurth Elektronic component which is used in electrical circuits that require high stately and reliability functions or performance.

### **Important Notes**

## The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

### **1. General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

		CHECKED SuPe	REVISION 001.002	DATE (YYYY-MM-DD) 2019-09-23	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	$\exists$	€-
ROHS COMPLIANT COMPLIANT HALOGEN		WP-BUTR REDCUBE PRESS-FIT							
Würth Elektronik elSco GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74633 Waldenburg Germany						ORDER CODE 746	1058		
	elinary Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	size/TYPE Terminals with plate	internal thread a	nd two rows pin-	BUSINESS UNIT eiCan	status Valid		- 1	page 3/3

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in entential submit and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be information intervork etc... Würth Elektronik elSos GmbH & Co KG must be information intervork etc... Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usege before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high state the require high state to every electrical circuits that require high state the require high state to every electrical circuits that require high state to every electrical circuits that require high state the require high state to every electrical circuits that require high state to